

# HILTI


# 100 X-EKSC 20 MX

# 274086









Made in Slovenia

7 613023 446477



**CE**  
16  
Hilti AG  
FL-9494 Schaan  
Hilti-DX-DoP-005  
ETA-16/0301  
EAD 330083-03-0601  
0672  
0672-CPR-0624  
Power-actuated fastener for  
multiple use in concrete for  
non-structural applications

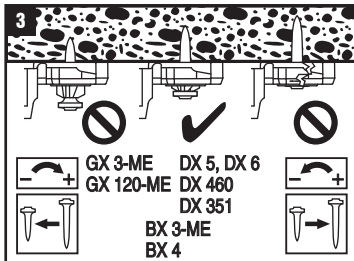

**UL** US  
**LISTED**  
POSITION DEVICE  
50PM

Temperature rating 65 °C (149 F),  
for indoor use, suitable for use in air  
handling spaces in accordance with  
Sec. 300-22(c) and (d) of the  
National Electrical Code.

2079564-2025.08.21